TEST REPORT

Applicant: ARMOUR CO., LTD

Address of Applicant: 218A-27-28 Thanh Thai Street, 15 Ward, District 10, Ho Chi Minh City, Viet Nam.

Equipment Under Test (EUT)

Product Name: LED DOWNLIGHT

Brand Name: ARMOUR Lighting

Model No.: Please Refer To Page 5.

Applicable standards: EN IEC 55015:2019+A11:2020
EN IEC 61547:2023
EN IEC 61000-3-2:2019+A1:2021
EN 61000-3-3:2013+A1:2019+A2:2021

Date of sample receipt: June 9, 2025

Date of Test: June 9, 2025 To June 18, 2025

Date of report issued: June 18, 2025

Test Result : PASS *

*In the configuration tested, the EUT complied with the standards specified above.

The CE mark as shown below can be used, under the responsibility of the manufacturer, after completion of an EC Declaration of Conformity and compliance with all relevant EC Directives.

CE

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.rcocn.cn and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.rcocn.cn Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	*June 18, 2025*	*Original*

Prepared By: *Amy* ***Date:*** *June 18, 2025*

Project Engineer

Reviewed By: ***Date:*** *June 18, 2025*

Reviewer

RADER CERTIFICATION CO., LTD. ***Add: Qiaohongsheng Cultural Creative Park, Yintian Industrial Zone, Xixiang Street, Bao 'an District, Shenzhen***
Tel: 0755-29451282 http://www.rcocn.cn

3 Contents

Page

1 COVER PAGE 1
2 VERSION 2
3 CONTENTS 3
4 TEST SUMMARY 4
5 GENERAL INFORMATION 5
5.1 CLIENT INFORMATION 5
5.2 GENERAL DESCRIPTION OF E.U.T 5
5.3 TEST MODE 5
5.4 DESCRIPTION OF SUPPORT UNITS 6
5.5 DEVIATION FROM STANDARDS 6
5.6 ABNORMALITIES FROM STANDARD CONDITIONS 6
5.7 MONITORING OF EUT FOR ALL IMMUNITY TEST 6
6 TEST INSTRUMENTS LIST 7
7 EMISSION TEST RESULTS 10
7.1 RADIATED EMISSIONS (9KHZ-30MHZ) 10
7.2 RADIATED EMISSIONS (30MHZ-1000MHZ) 14
7.3 CONDUCTED EMISSIONS 17
7.4 HARMONICS CURRENT EMISSION 20
7.5 VOLTAGE FLUCTUATIONS AND FLICKER 20
8 IMMUNITY TEST RESULTS 21
8.1 PERFORMANCE CRITERIA DESCRIPTION OF EN IEC 61547 21
8.2 ELECTROSTATIC DISCHARGE 22
8.3 RADIATED IMMUNITY 24
8.4 ELECTRICAL FAST TRANSIENTS 26
8.5 SURGES 28
8.6 CONDUCTED IMMUNITY 30
8.7 VOLTAGE DIPS AND INTERRUPTIONS 32
9 EUT CONSTRUCTIONAL DETAILS 33

RADER CERTIFICATION CO., LTD.
Add: Qiaohongsheng Cultural Creative Park, Yintian Industrial Zone, Xixiang Street, Bao 'an District, Shenzhen
Tel: 0755-29451282 http://www.rcocn.cn

4 Test Summary

Test Item	Test Requirement	Test Method	Class / Severity	Result
Radiated Emissions (30MHz-1000MHz)	EN IEC 55015	EN IEC 55015	Table 10	Pass
Radiated Emissions (9kHz-30MHz)	EN IEC 55015	EN IEC 55015	Table 8	Pass
Conducted Emissions	EN IEC 55015	EN IEC 55015	Table 1	Pass
Harmonic Current Emission	EN IEC 61000-3-2	EN IEC 61000-3-2	Class C	Pass
Voltage Fluctuations and Flicker	EN 61000-3-3	EN 61000-3-3	Clause 5 of EN61000-3-3	Pass
Electrostatic discharges	EN IEC 61547	EN 61000-4-2	Contact ± 4 kV Air± 8 kV	Pass
Radiated Immunity	EN IEC 61547	EN 61000-4-3	3V/m 80%, 1kHz, AM	Pass
Electrical Fast Transients	EN IEC 61547	EN 61000-4-4	AC ± 1.0kV	Pass
Surges	EN IEC 61547	EN 61000-4-5	1kV Line to Line 2kV Line to Ground	Pass
Conducted Immunity	EN IEC 61547	EN 61000-4-6	3Vrms (emf), 80%, 1kHz Amp. Mod.	Pass
Voltage dips and Interruptions	EN IEC 61547	EN 61000-4-11	0 % UT for 0.5per 70 % UT for 10per UT is Supply Voltage	Pass

Remark:

UT is the nominal supply voltage.*

RADER CERTIFICATION CO., LTD.
Add: Qiaohongsheng Cultural Creative Park, Yintian Industrial Zone, Xixiang Street, Bao 'an District, Shenzhen
Tel: 0755-29451282 http://www.rcocn.cn

5 General Information

5.1 Client Information

Applicant:	ARMOUR CO., LTD
Address of Applicant:	218A-27-28 Thanh Thai Street, 15 Ward, District 10, Ho Chi Minh City, Viet Nam.
Manufacturer:	ARMOUR CO., LTD
Address of Manufacturer:	218A-27-28 Thanh Thai Street, 15 Ward, District 10, Ho Chi Minh City, Viet Nam.

5.2 General Description of E.U.T

Product Name:	LED DOWNLIGHT
Brand Name:	ARMOUR Lighting
Model No.:	ARM01-100301
Test Model No.:	Please Refer To below.
Power Supply:	AC 220V-230V, 50Hz, 30W

Model No.:

ARM01-100301	ARM01-100011	ARM01-100012	ARM01-100013
ARM01-100014	ARM01-100015	ARM01-100031	ARM01-100032
ARM01-100033	ARM01-100034	ARM01-100035	ARM01-100051
ARM01-100052	ARM01-100053	ARM01-100054	ARM01-100055
ARM01-100071	ARM01-100072	ARM01-100073	ARM01-100074
ARM01-100075	ARM01-100091	ARM01-100092	ARM01-100093
ARM01-100094	ARM01-100095	ARM01-1000111	ARM01-1000112
ARM01-1000113	ARM01-1000114	ARM01-1000115	ARM01-1000131
ARM01-1000132	ARM01-1000133	ARM01-1000134	ARM01-1000135
ARM01-1000151	ARM01-1000152	ARM01-1000153	ARM01-1000154
ARM01-1000155	ARM01-1000181	ARM01-1000182	ARM01-1000183
ARM01-1000184	ARM01-1000185	ARM01-1000201	ARM01-1000202
ARM01-1000203	ARM01-1000204	ARM01-1000205	ARM01-1000251
ARM01-1000252	ARM01-1000253	ARM01-1000254	ARM01-1000255
ARM01-1000281	ARM01-1000282	ARM01-1000283	ARM01-1000284
ARM01-1000285	ARM01-1000302	ARM01-1000303	ARM01-1000304
ARM01-1000305			
Remark: All models are identical in the same PCB layout, interior structure and electrical circuits. The only differences are the model name and appearance color for commercial purpose.			

5.3 Test mode

On mode	Keep the EUT lighting
Test voltage	AC 230V/50Hz

5.4 Description of Support Units

None.

5.5 Deviation from Standards

None.

5.6 Abnormalities from Standard Conditions

None.

5.7 Monitoring of EUT for All Immunity Test

Visual:	Monitor the lighting of EUT
Audio:	N/A

6 Test Instruments List

Radiated Emission:						
Item	**Test Equipment**	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal.Date (mm-dd-yy)**	**Cal.Due date (mm-dd-yy)**
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	N/A	N/A
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	ROHDE & SCHWARZ	ESRP	GTS602	Mar. 15 2025	Mar. 14 2026
4	BiConiLog Antenna	SCHWARZBECK	VULB 9168	GTS606	Mar. 15 2025	Mar. 14 2026
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 20 2024	June. 19 2025
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 20 2024	June. 19 2025
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 20 2024	June. 19 2025
9	Coaxial Cable	GTS	N/A	GTS211	June. 20 2024	June. 19 2025
10	Coaxial cable	GTS	N/A	GTS210	June. 20 2024	June. 19 2025
11	Coaxial Cable	GTS	N/A	GTS212	June. 20 2024	June. 19 2025
12	Amplifier(100kHz-3GHz)	N/A	LNA 0920N	GTS605	Mar. 15 2025	Mar. 14 2026
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 20 2024	June. 19 2025
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 20 2024	June. 19 2025
15	Band filter	Amindeon	82346	GTS219	June. 20 2024	June. 19 2025
16	Power Meter	Anritsu	ML2495A	GTS540	June. 20 2024	June. 19 2025
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 20 2024	June. 19 2025
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 20 2024	June. 19 2025
19	Splitter	Agilent	11636B	GTS237	June. 20 2024	June. 19 2025
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 20 2024	June. 19 2025
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 5 2024	Oct. 4 2025
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 5 2024	Oct. 4 2025
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 5 2024	Oct. 4 2025
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 20 2024	June. 19 2025

Conducted Emission						
Item	**Test Equipment**	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal.Date (mm-dd-yy)**	**Cal.Due date (mm-dd-yy)**
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.13 2025	May.12 2028
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 20 2024	June. 19 2025
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 20 2024	June. 19 2025
4	ENV216 2-L-V-NETZNACHB.DE	ROHDE&SCHWARZ	ENV216	GTS226	June. 20 2024	June. 19 2025
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June. 20 2024	June. 19 2025
8	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	June. 20 2024	June. 19 2025
9	ISN	SCHWARZBECK	NTFM 8158	GTS565	June. 20 2024	June. 19 2025

RADER CERTIFICATION CO., LTD.
Add: Qiaohongsheng Cultural Creative Park, Yintian Industrial Zone, Xixiang Street, Bao 'an District, Shenzhen
Tel: 0755-29451282 http://www.rcocn.cn

ESD						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	ESD Simulator	KIKUSUI	KES4021A	GTS242	June. 20 2024	June. 19 2025
2	Thermo meter	KTJ	TA328	GTS243	June. 20 2024	June. 19 2025

Conducted Immunity						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Signal Generator	ROHDE & SCHWARZ	SMB 100A	GTS553	June. 20 2024	June. 19 2025
2	CDN	LionCEL	CDN-M3-16	GTS554	June. 20 2024	June. 19 2025
3	CDN	CYBERTEK	EM 5070	GTS559	June. 20 2024	June. 19 2025
4	Power amplifier	rflight	NTWPA-00010475	GTS555	June. 20 2024	June. 19 2025
5	ATT	SUNWAVE	SJ-50-06DB	GTS556	June. 20 2024	June. 19 2025
6	Clamp	SCHAFFNER	KEMZ 801	GTS558	June. 20 2024	June. 19 2025

Harmonic/ Flicker						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Power Analyzer H/F	EMTEST	DPA500	GTS235	June. 20 2024	June. 19 2025
2	AC POWER SUPPLY	EMTEST	ACS500	GTS236	June. 20 2024	June. 19 2025
3	Thermo meter	KTJ	TA328	GTS256	June. 20 2024	June. 19 2025

EFT, Surge, Voltage dips and Interruption						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	EMTEST system	EMTEST	UCS500N	GTS239	June. 20 2024	June. 19 2025
2	Clamp	EMTEST	HFK	GTS557	June. 20 2024	June. 19 2025
3	Thermo meter	KTJ	TA328	GTS238	June. 20 2024	June. 19 2025

Radiated Immunity						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Fully-Anechoic Chamber 2	Chang Zhou Zhong Shuo	854	SEM001-05	April. 06, 2025	April. 05, 2026
2	Power Sensor	Rohde & Schwarz	NRP-Z91	SEM009-09	April. 06, 2025	April. 05, 2026
3	Stacked Log.-Per.-Broadband Antenna (70MHz-10GHz)	Schwarzbeck	STLP 9129	SEM003-25	N/A	N/A
4	Signal Generator (9kHz-6GHz)	Rohde & Schwarz	SMB100A	SEM006-11	April. 06, 2025	April. 05, 2026
5	Broadband Amplifier (80MHz-1GHz)	Rohde & Schwarz	BBA150-BC250	SEM005-12	Sep. 19 2024	Sep. 18 2025
6	Broadband Amplifier(800MHz-3GHz)	Rohde & Schwarz	BBA150-D110	SEM005-13	April. 06, 2025	April. 05, 2026
7	Broadband Amplifier(2.5GHz-6GHz)	Rohde & Schwarz	BBA150-E60	SEM005-16	April. 06, 2025	April. 05, 2026
8	Measurement Software	Rohde & Schwarz	EMC32 V9.25.00	N/A	N/A	N/A

RADER CERTIFICATION CO., LTD.
Add: Qiaohongsheng Cultural Creative Park, Yintian Industrial Zone, Xixiang Street, Bao 'an District, Shenzhen
Tel: 0755-29451282 http://www.rcocn.cn

General used equipment:						
Item	**Test Equipment**	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal.Date (mm-dd-yy)**	**Cal.Due date (mm-dd-yy)**
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 20 2024	June. 19 2025
2	Barometer	ChangChun	DYM3	GTS255	June. 20 2024	June. 19 2025

RADER CERTIFICATION CO., LTD.
Add: Qiaohongsheng Cultural Creative Park, Yintian Industrial Zone, Xixiang Street, Bao 'an District, Shenzhen
Tel: 0755-29451282 http://www.rcocn.cn

7 Emission Test Results

7.1 Radiated Emissions (9kHz-30MHz)

<table>
<tr><td>Test Requirement:</td><td colspan="3">EN IEC 55015</td></tr>
<tr><td>Test Method:</td><td colspan="3">EN IEC 55015</td></tr>
<tr><td>Test Frequency Range:</td><td colspan="3">9kHz to 30MHz</td></tr>
<tr><td>Limit:</td><td colspan="3">
<table>
<tr><th>Frequency range (MHz)</th><th>Limits for loop diameter dBuA @2m</th></tr>
<tr><td>0.009-0.070</td><td>88</td></tr>
<tr><td>0.070-0.150</td><td>88 to 58*</td></tr>
<tr><td>0.15-3.0</td><td>58 to22*</td></tr>
<tr><td>3.0-30</td><td>22</td></tr>
</table>
*Decreasing linearly with the logarithm of the frequency.
For electrodeless lamps and luminaires, the limit in the frequency range of 2,2 MHz to 3,0 MHz is 58 dB(μA) for 2 m, 51dB(μA) for 3 m and 45 dB(μA) for 4 m loop diameter.
</td></tr>
<tr><td>Test Setup:</td><td colspan="3"> 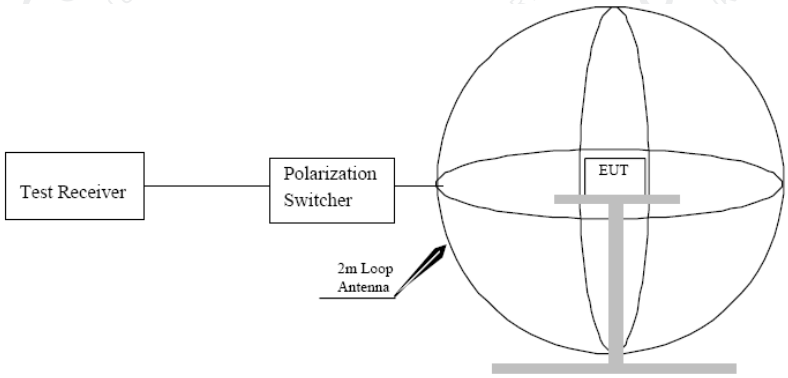
</td></tr>
<tr><td>Test procedure</td><td colspan="3">1. An initial pre-scan was performed in the 2m loop antenna using the spectrum analyser in peak detection mode.
2. The EUT was measured for X(A), Y(B), Z(C) polarities.
3. No further quasi-peak measurements were performed since no peak emissions from the EUT were detected within 6dB of the limit for 2m diameter loop antenna.</td></tr>
<tr><td>Test Instruments:</td><td>Temp.: 25 °C</td><td>Humid.: 50%</td><td>Press.: 1012mbar</td></tr>
<tr><td>Measurement Record:</td><td colspan="3">Uncertainty: ± 4.5dB</td></tr>
<tr><td>Test Instruments:</td><td colspan="3">Refer to section 6 for details</td></tr>
<tr><td>Test mode:</td><td colspan="3">Refer to section 5.3 for details.</td></tr>
<tr><td>Test results:</td><td colspan="3">Pass</td></tr>
</table>

Measurement Data

Axial: X

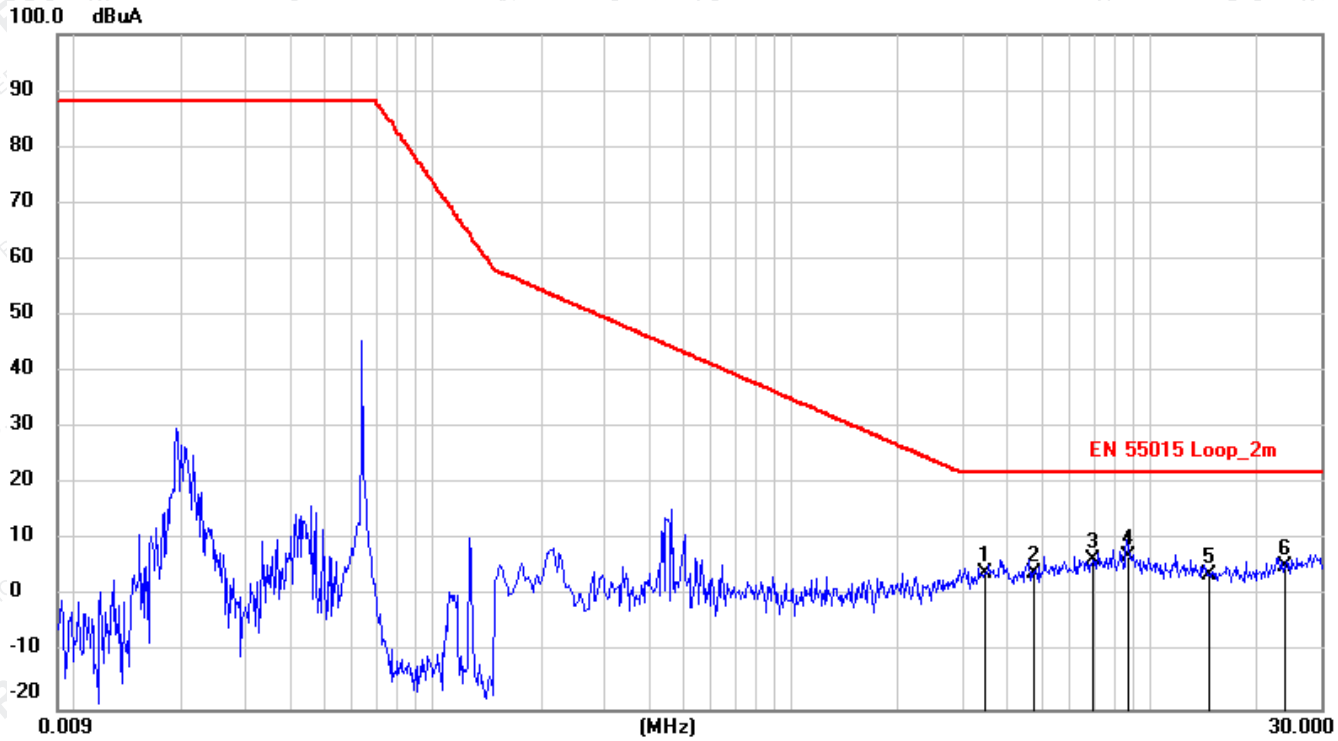

No.	Frequency (MHz)	Reading (dBuA)	Correct dB	Result (dBuA)	Limit (dBuA)	Margin (dB)	Remark
1	3.4891	-30.45	34.55	4.10	22.00	-17.90	QP
2	4.7581	-30.83	34.92	4.09	22.00	-17.91	QP
3	6.9631	-28.67	35.09	6.42	22.00	-15.58	QP
4	8.6776	-27.84	34.88	7.04	22.00	-14.96	QP
5	14.6491	-30.76	34.66	3.90	22.00	-18.10	QP
6	23.7391	-29.56	35.01	5.45	22.00	-16.55	QP

Axial: Y

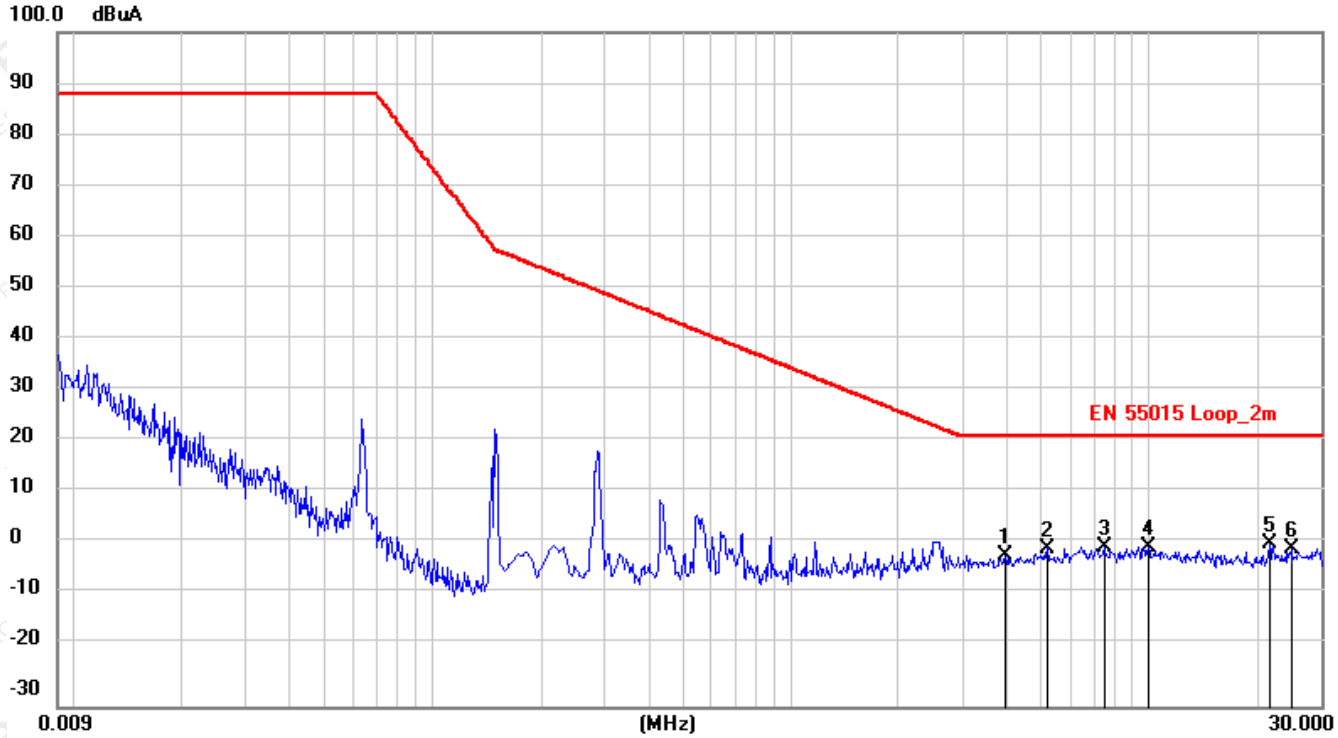

No.	Frequency (MHz)	Reading (dBuA)	Correct dB	Result (dBuA)	Limit (dBuA)	Margin (dB)	Remark
1	3.9571	-35.28	34.50	-0.78	22.00	-22.78	QP
2	5.1946	-34.20	34.75	0.55	22.00	-21.45	QP
3	7.4581	-34.37	35.04	0.67	22.00	-21.33	QP
4	9.8836	-34.41	35.12	0.71	22.00	-21.29	QP
5	21.5836	-32.72	34.18	1.46	22.00	-20.54	QP
6	24.7201	-33.88	34.35	0.47	22.00	-21.53	QP

RADER CERTIFICATION CO., LTD.
Add: Qiaohongsheng Cultural Creative Park, Yintian Industrial Zone, Xixiang Street, Bao 'an District, Shenzhen
Tel: 0755-29451282 http://www.rcocn.cn

Axial: Z

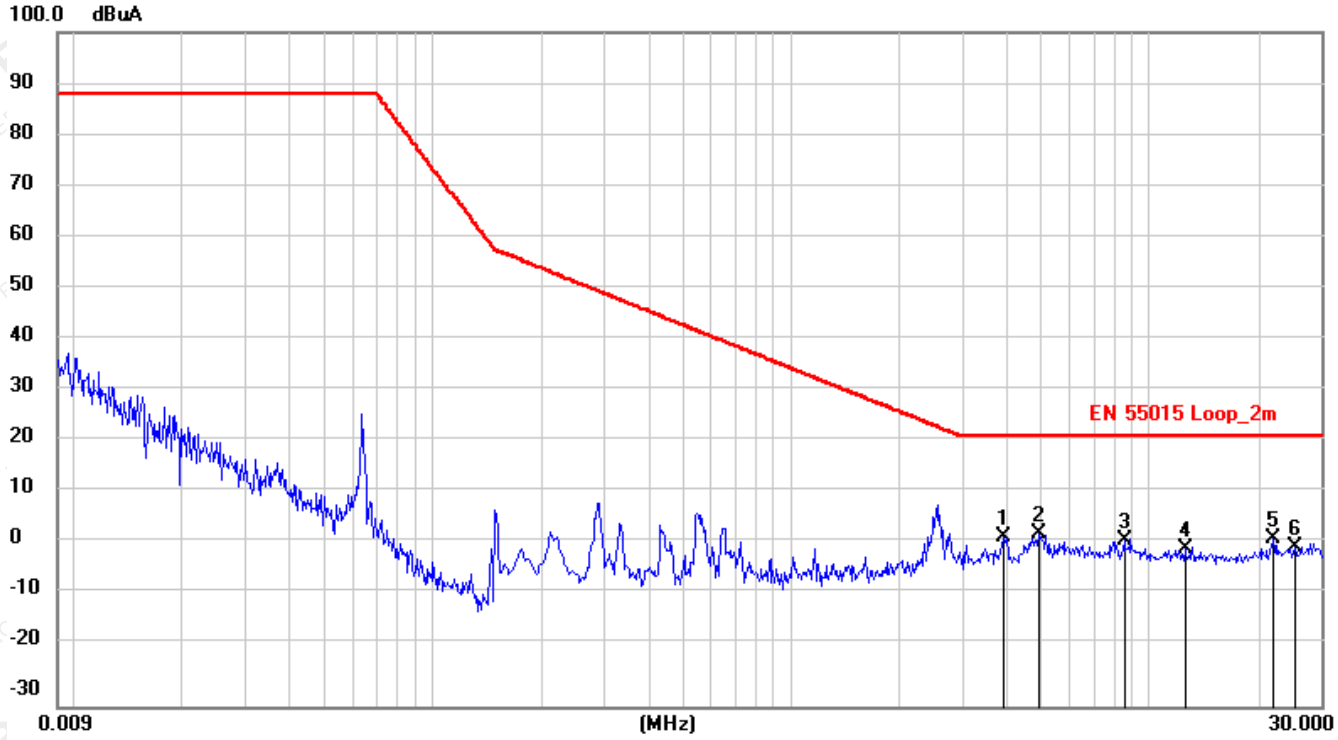

No.	Frequency (MHz)	Reading (dBuA)	Correct dB	Result (dBuA)	Limit (dBuA)	Margin (dB)	Remark
1	3.9256	-31.42	34.21	2.79	22.00	-19.21	QP
2	4.9111	-31.12	34.44	3.32	22.00	-18.68	QP
3	8.4751	-32.72	34.87	2.15	22.00	-19.85	QP
4	12.5206	-34.44	34.89	0.45	22.00	-21.55	QP
5	22.1731	-32.60	34.96	2.36	22.00	-19.64	QP
6	25.4940	-34.33	35.07	0.74	22.00	-21.26	QP

RADER CERTIFICATION CO., LTD.
Add: Qiaohongsheng Cultural Creative Park, Yintian Industrial Zone, Xixiang Street, Bao 'an District, Shenzhen
Tel: 0755-29451282 http://www.rcocn.cn

7.2 Radiated Emissions (30MHz-1000MHz)

Test Requirement:	EN IEC 55015
Test Method:	EN IEC 55015
Test Frequency Range:	30MHz to 1000MHz
Measurement Distance:	3m
Limit:	Frequency range(MHz) / Limit (dBuV/m) 30 to 230 / 40.00 230 to 1000 / 47.00
Test setup:	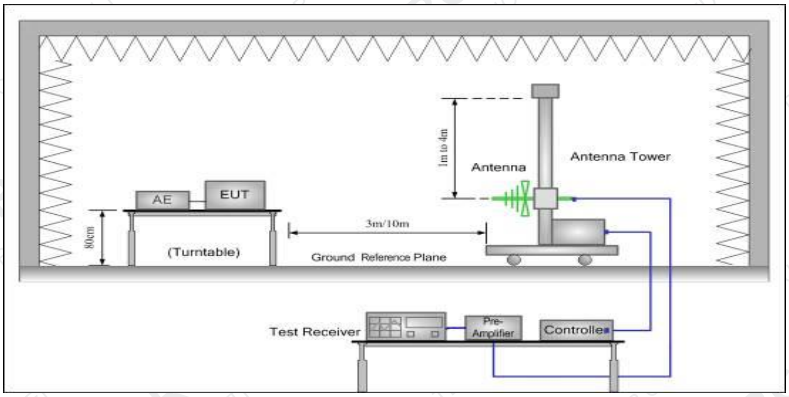
Test procedure	1. The radiated emissions test was conducted in a semi-anechoic chamber. 2. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation. 3. Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emissions spectrum plots of the EUT. 4. The frequencies of maximum emission were determined in the final radiated emissions measurement. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization.
Test Instruments:	Temp.: 25 °C / Humid.: 50% / Press.: 1012mbar
Measurement Record:	**Uncertainty: ± 4.50dB**
Test Instruments:	Refer to section 6 for details
Test mode:	Refer to section 5.3 for details.
Test results:	Pass

Measurement Data

Test mode:	On mode	Antenna Polarity:	Horizontal

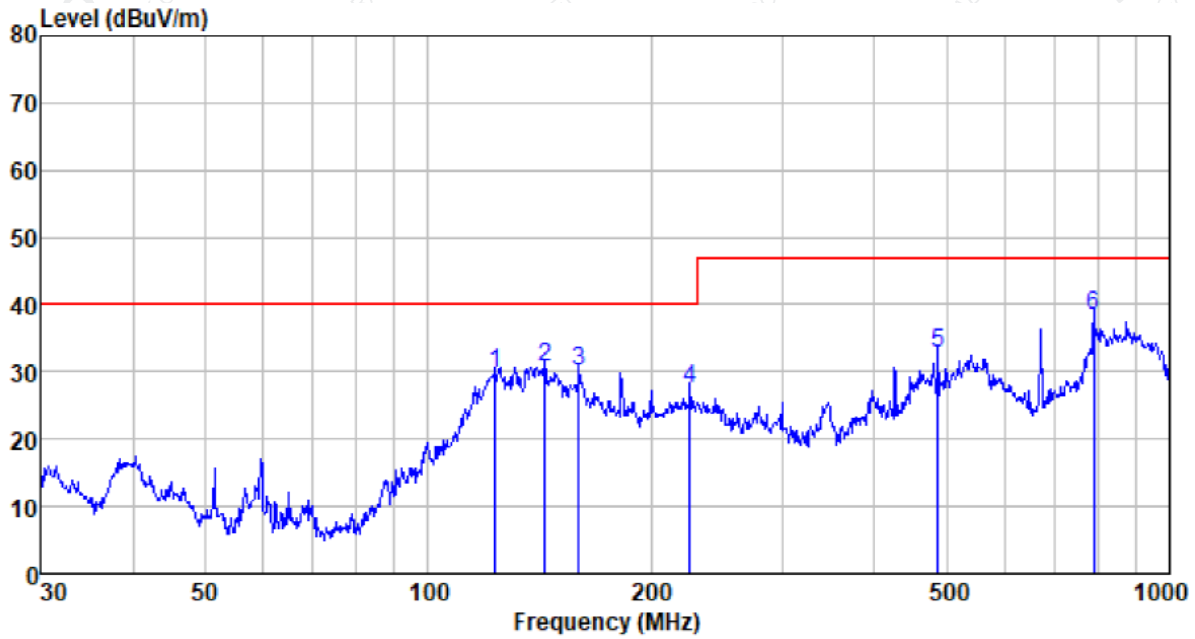

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
123.266	50.39	11.41	1.38	33.36	29.82	40.00	-10.18	QP
143.830	49.99	12.44	1.53	33.18	30.78	40.00	-9.22	QP
159.784	48.94	12.60	1.63	33.06	30.11	40.00	-9.89	QP
225.308	47.60	10.66	1.99	32.77	27.48	40.00	-12.52	QP
487.315	44.05	17.38	3.25	32.04	32.64	47.00	-14.36	QP
790.619	42.74	22.53	4.42	31.29	38.40	47.00	-8.60	QP

RADER CERTIFICATION CO., LTD.
Add: Qiaohongsheng Cultural Creative Park, Yintian Industrial Zone, Xixiang Street, Bao 'an District, Shenzhen
Tel: 0755-29451282 http://www.rcocn.cn

Test mode:	On mode	Antenna Polarity:	Vertical

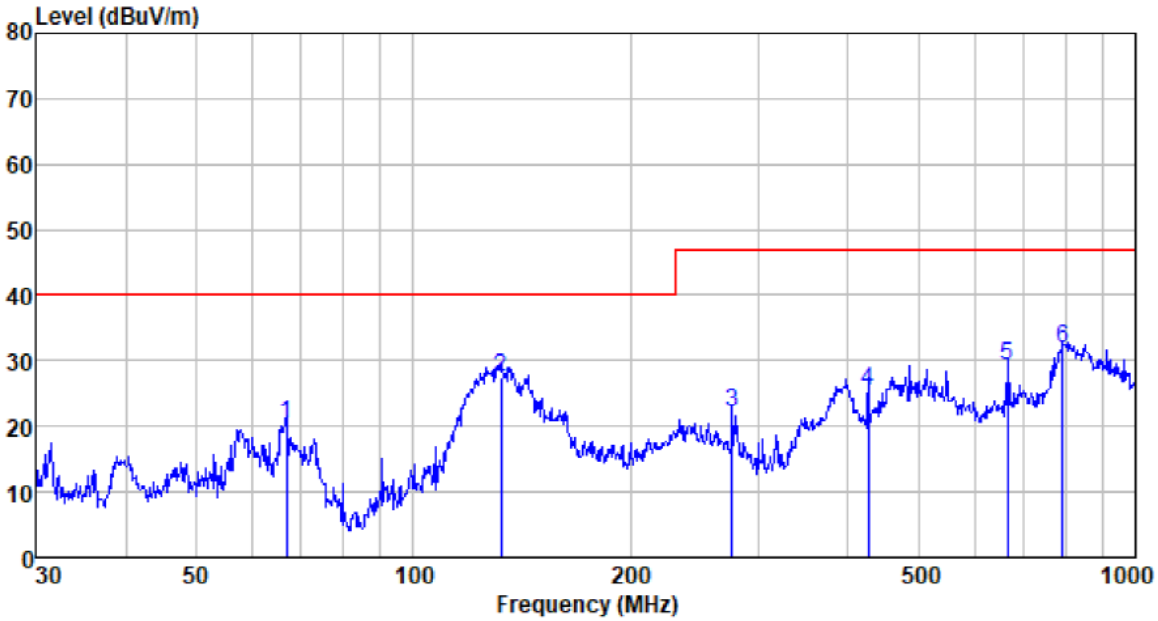

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
66.733	42.05	11.15	0.91	33.61	20.50	40.00	-19.50	QP
132.221	47.36	11.95	1.45	33.28	27.48	40.00	-12.52	QP
276.124	40.03	12.60	2.25	32.72	22.16	47.00	-24.84	QP
426.521	38.39	16.25	2.98	32.22	25.40	47.00	-21.60	QP
665.804	36.53	20.31	3.97	31.66	29.15	47.00	-17.85	QP
793.396	36.18	22.58	4.43	31.28	31.91	47.00	-15.09	QP

7.3 Conducted Emissions

Test Requirement:	EN IEC 55015
Test Method:	EN IEC 55015
Test Frequency Range:	9kHz to 30MHz
Limit:	

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.009-0.05	110	-
0.05-0.15	90-80*	-
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

Test setup:

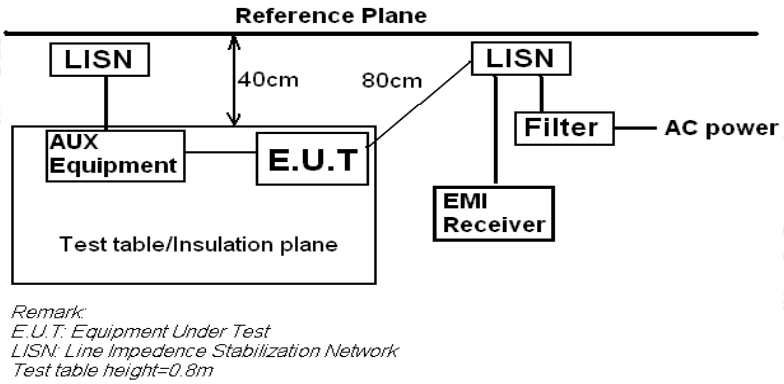

Remark:
E.U.T: Equipment Under Test
LISN: Line Impedence Stabilization Network
Test table height=0.8m

Test procedure

1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment.
2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs).
3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to EN55022 Class B on conducted measurement.

Test Instruments:	Temp.: 25 °C	Humid.: 50%	Press.: 1012mbar
Measurement Record:			Uncertainty: ± 3.45dB
Test Instruments:	Refer to section 6 for details		
Test mode:	Refer to section 5.3 for details.		
Test results:	Pass		

Measurement Data

Test mode:	On mode	Antenna Polarity:	Line

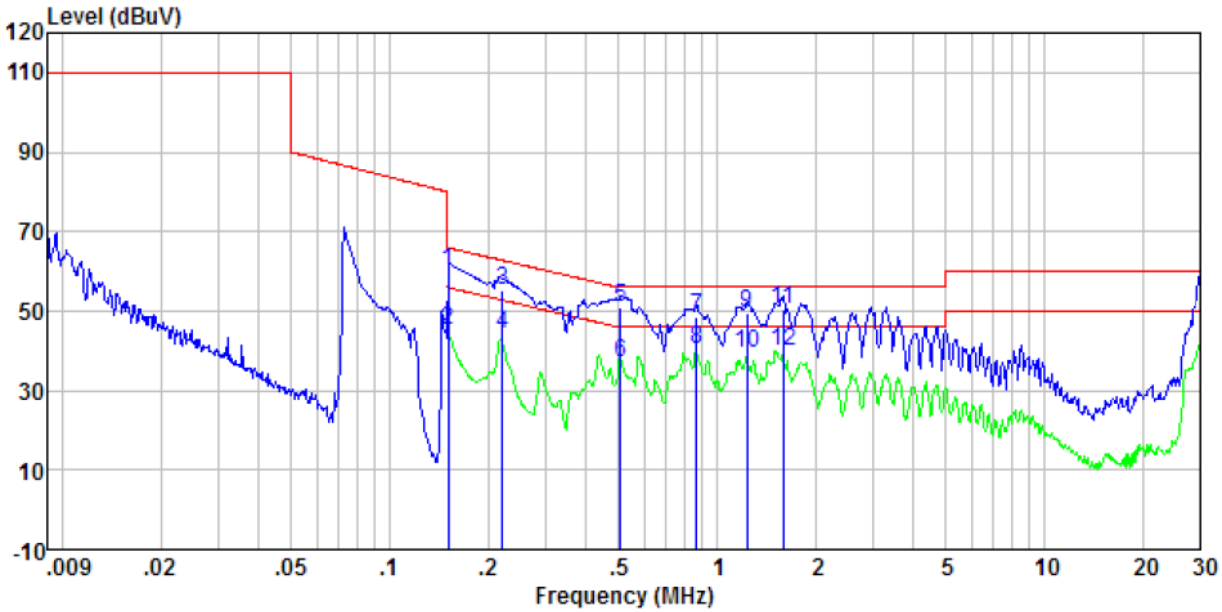

Freq MHz	Reading level dBuV	LISN/ISN factor dB/m	Cable loss dB	Level dBuV	Limit level dBuV	Over limit dB	Remark
0.15	59.72	0.40	0.07	60.19	65.92	-5.73	QP
0.15	44.72	0.40	0.07	45.19	55.92	-10.73	Average
0.22	54.58	0.40	0.11	55.09	62.75	-7.66	QP
0.22	43.58	0.40	0.11	44.09	52.75	-8.66	Average
0.51	50.41	0.31	0.11	50.83	56.00	-5.17	QP
0.51	36.41	0.31	0.11	36.83	46.00	-9.17	Average
0.87	48.13	0.22	0.14	48.49	56.00	-7.51	QP
0.87	40.13	0.22	0.14	40.49	46.00	-5.51	Average
1.24	48.93	0.20	0.16	49.29	56.00	-6.71	QP
1.24	38.93	0.20	0.16	39.29	46.00	-6.71	Average
1.59	50.28	0.20	0.17	50.65	56.00	-5.35	QP
1.59	39.28	0.20	0.17	39.65	46.00	-6.35	Average

Test mode:	On mode	Antenna Polarity:	Neutral

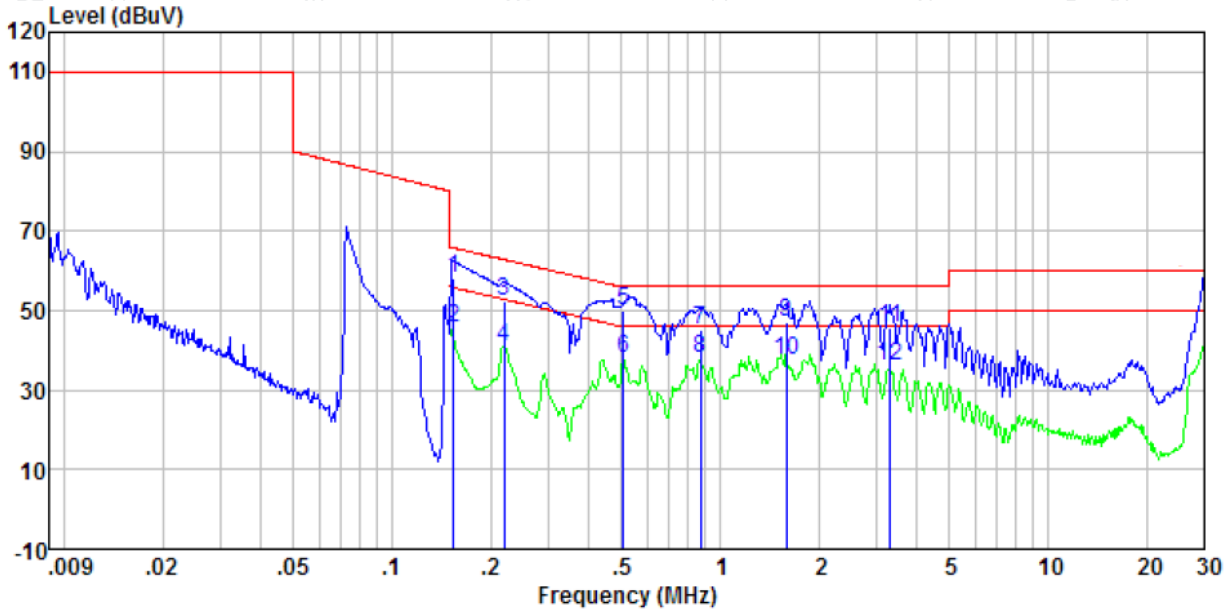

Freq MHz	Reading level dBuV	LISN/ISN factor dB/m	Cable loss dB	Level dBuV	Limit level dBuV	Over limit dB	Remark
0.15	57.85	0.40	0.07	58.32	65.79	-7.47	QP
0.15	45.23	0.40	0.07	45.70	55.79	-10.09	Average
0.22	51.91	0.40	0.11	52.42	62.82	-10.40	QP
0.22	40.50	0.40	0.11	41.01	52.82	-11.81	Average
0.51	49.64	0.31	0.11	50.06	56.00	-5.94	QP
0.51	37.65	0.31	0.11	38.07	46.00	-7.93	Average
0.87	44.90	0.22	0.14	45.26	56.00	-10.74	QP
0.87	37.82	0.22	0.14	38.18	46.00	-7.82	Average
1.59	46.71	0.20	0.17	47.08	56.00	-8.92	QP
1.59	37.20	0.20	0.17	37.57	46.00	-8.43	Average
3.30	45.48	0.20	0.19	45.87	56.00	-10.13	QP
3.30	35.43	0.20	0.19	35.82	46.00	-10.18	Average

7.4 Harmonics Current Emission

Test Requirement:	EN IEC 61000-3-2		
Test Method:	EN IEC 61000-3-2		
Frequency range:	100Hz to 2kHz		
Measurement Time:	2.5 min		
Class/Severity:	Class C		
Detector:	As per EN 61000-3-2		
Test environment:	Temp.:24 °C	Humid.: 51%	Press.: 1012mbar
Test Instruments:	Refer to section 6 for details		
Test mode:	Refer to section 5.3 for details		
Test results:	Pass		

7.5 Voltage Fluctuations and Flicker

Test Requirement:	EN 61000-3-3		
Test Method:	EN 61000-3-3		
Class/Severity:	Clause 5 of EN 61000-3-3		
Measurement Time:	10 min		
Detector:	As per EN 61000-3-3		
Test environment:	Temp.:24 °C	Humid.: 51%	Press.: 1012mbar
Test Instruments:	Refer to section 6 for details		
Test mode:	Refer to section 5.3 for details		
Test results:	Pass		

Measurement Data

	EUT values	Limit	Result
Pst	0.045	1.00	PASS
dc [%]	0.000	3.30	PASS
dmax [%]	0.063	4.00	PASS
dt [s]	0.000	0.50	PASS

RADER CERTIFICATION CO., LTD.
Add: Qiaohongsheng Cultural Creative Park, Yintian Industrial Zone, Xixiang Street, Bao 'an District, Shenzhen
Tel: 0755-29451282 http://www.rcocn.cn

8 Immunity Test Results

8.1 Performance Criteria Description of EN IEC 61547

Criterion A:	During the test no change of the luminous intensity shall be observed and the regulating control, if any, shall operate during the test as intended.
Criterion B:	During the test the luminous intensity may change to any value. After the test the luminous intensity shall be restored to its initial value within 1 min. Regulating controls need not function during the test, but after the test the mode of the control shall be the same as before the test provided that during the test no mode changing commands were given.
Criterion C:	During and after the test any change of the luminous intensity is allowed and the lamp(s) may be extinguished. After the test, within 30 min, all functions shall return to normal if necessary by temporary interruption of the mains supply and/or operating the regulating control.

8.2 Electrostatic Discharge

Test Requirement:	EN IEC 61547
Test Method:	EN 61000-4-2
Discharge Voltage:	Contact Discharge: ±4kV Air Discharge: ±8kV HCP/VCP: ±4kV
Polarity:	Positive & Negative
Number of Discharge:	Minimum 10 times at each test point.
Discharge Mode:	Single Discharge
Discharge Period:	1 second minimum
Performance Criterion:	B
Test setup:	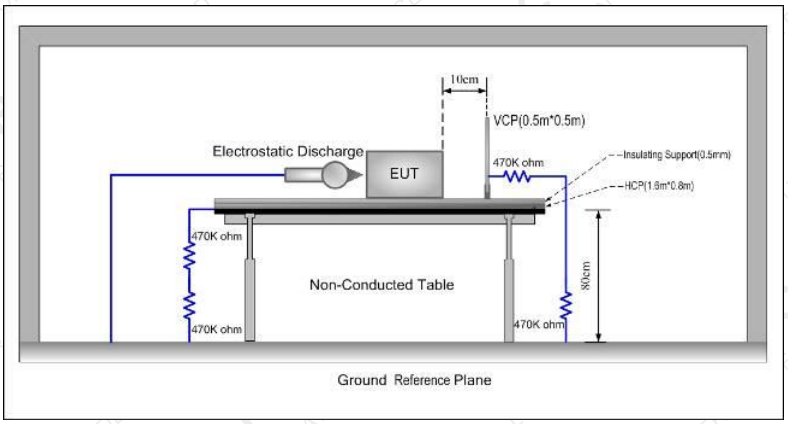
Test Procedure:	1. Air discharge: The test was applied on non-conductive surfaces of EUT. The round discharge tip of the discharge electrode was approached as fast as possible to touch the EUT. After each discharge, the discharge electrode was removed from the EUT. The generator was re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure was repeated until all the air discharge completed 2. Contact Discharge: The test was applied on conductive surfaces of EUT. the generator was re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. the tip of the discharge electrode was touch the EUT before the discharge switch was operated. 3. Indirect discharge for horizontal coupling plane At least 10 single discharges shall be applied at the front edge of each HCP opposite the centre point of each unit of the EUT and 0.1m from the front of the EUT. The long axis of the discharge electrode shall be in the plane of the HCP and perpendicular to its front edge during the discharge. Consideration should be given to exposing all sides of the EUT. 4. Indirect discharge for vertical coupling plane At least 10 single discharges were applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X

	0.5m, was placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges were applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.		
Test environment:	Temp.: 24 °C	Humid.: 51%	Press.: 1012mbar
Test mode:	Refer to section 5.3 for detail		
Test Instruments:	Refer to section 6 for details		
Test results:	Pass		

Measurement Record:

Test points:	I: Metal
	II: Seams

Direct discharge

Discharge Voltage (KV)	Type of discharge	Test points	Observations (Performance Criterion)	Result
± 4	Contact	I	A	Pass
± 8	Air	II	A	Pass

Indirect discharge

Discharge Voltage (KV)	Type of discharge	Test points	Observation Performance	Result
± 4	HCP-Bottom/Top/ Front/Back/Left/Right	Edge of the HCP	A	Pass
± 4	VCP-Front/Back /Left/Right	Center of the VCP	A	Pass

Remark:

Performance Criteria: A, B, C: Refer to section 8.1 for details

RADER CERTIFICATION CO., LTD.
Add: Qiaohongsheng Cultural Creative Park, Yintian Industrial Zone, Xixiang Street, Bao 'an District, Shenzhen
Tel: 0755-29451282 http://www.rcocn.cn

8.3 Radiated Immunity

Test Requirement:	EN IEC 61547
Test Method:	EN 61000-4-3
Frequency range:	80MHz to 1GHz
Test Level:	3V/m
Modulation:	80%, 1kHz Amplitude Modulation
Performance Criterion:	A
Test setup:	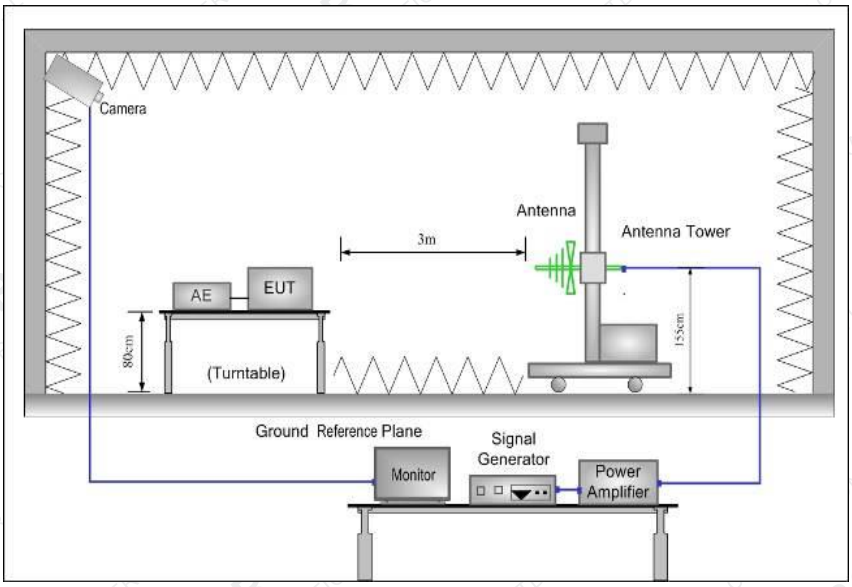
Test Procedure:	1. For table-top equipment, the EUT was placed in the chamber on a non-conductive table 0.8m high. For arrangement of floor-standing equipment, the EUT was mounted on a non-conductive support 0.1m above the supporting plane. For human body-mounted equipment, the EUT may be tested in the same manner as table top items. 2. If possible, a minimum of 1 m of cable is exposed to the electromagnetic field. Excess length of cables interconnecting units of the EUT shall be bundled low-inductively in the approximate center of the cable to form a bundle 30 cm to 40 cm in length. 3. The EUT was initially placed with one face coincident with the calibration plane. The EUT face being illuminated was contained within the UFA (Uniform Field Area). 4. The frequency ranges to be considered were swept with the signal modulated and pausing to adjust the RF signal level or to switch oscillators and antennas as necessary.Where the frequency range was swept incrementally, the step size was not exceed 1 % of the preceding frequency value. 5. The dwell time of the amplitude modulated carrier at each frequency was not be less than the time necessary for the EUT to be exercised and to respond, and was not less than 0,5 s. 6. The test normally was performed with the generating antenna facing each side of the EUT. 7. The polarization of the field generated by each antenna necessitates testing each selected side twice, once with the antenna positioned

	vertically and again with the antenna positioned horizontally. 8. The EUT was performed in a configuration to actual installation conditions, a video camera and/or a audio monitor were used to monitor the performance of the EUT.		
Test environment:	Temp.: 25 °C	Humid.: 52%	Press.: 1012mbar
Test Instruments:	Refer to section 6 for details		
Test mode:	Refer to section 5.3 for details		
Test results:	Pass		

Measurement Record:

Frequency	Level	Modulation	Antenna Polarization	EUT Face	**Observations** (Performance Criterion)
80 MHz-1 GHz	3 V/m	1 kHz, 80 % Amp. Mod, 1 % increment, dwell time=3seconds	V	Front	A
			H		A
			V	Rear	A
			H		A
			V	Left	A
			H		A
			V	Right	A
			H		A
			V	Top	A
			H		A
			V	Bottom	A
			H		A

Remarks:

Performance Criteria: A, B, C: Refer to section 8.1 for details

8.4 Electrical fast transients

Test Requirement:	EN IEC 61547
Test Method:	EN 61000-4-4
Test Level:	1.0kV on AC port
Polarity:	Positive & Negative
Repetition Frequency:	5kHz
Burst Duration:	15ms
Burst Period:	300ms
Test Duration:	2 minute per level & polarity
Performance Criterion:	B
Test setup:	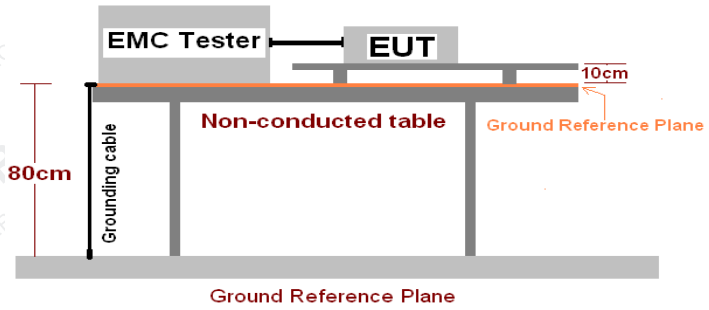
Test Procedure:	1. The EUT and its simulators were placed on the ground reference plane and were insulated from it by a wood support 0.1m + 0.01m thick. 2. The ground reference plane was 1m*1m metallic sheet with 0.65mm minimum thickness. 3. This reference ground plane was project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane was more than 0.5m. All cables to the EUT was placed on the wood support, cables not subject to EFT/B was routed as far as possible from the cable under test to minimize the coupling between the cables. 4. The EUT is connected to the power mains through a coupling device that directly couples the EFT/B interference signal. 5. Each of the Line and Neutral conductors is impressed with burst noise for 2 minutes. 6. The length of the signal and power lines between the coupling device and the EUT is 0.5m
Test environment:	Temp.: 26 °C / Humid.: 54% / Press.: 1012mbar
Test Instruments:	Refer to section 6 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement Record:

Lead under Test	**Level (±kV)**	**Coupling Direct/Clamp**	**Observations** (Performance Criterion)	Result
L	± 1.0	Direct	A	Pass
N	± 1.0	Direct	A	Pass
L-N	± 1.0	Direct	A	Pass

Remarks:

Performance Criteria: A, B, C: Refer to section 8.1 for details

RADER CERTIFICATION CO., LTD.
Add: Qiaohongsheng Cultural Creative Park, Yintian Industrial Zone, Xixiang Street, Bao 'an District, Shenzhen
Tel: 0755-29451282 http://www.rcocn.cn

8.5 Surges

<table>
<tr><td>Test Requirement:</td><td>EN IEC 61547</td></tr>
<tr><td>Test Method:</td><td>EN 61000-4-5</td></tr>
<tr><td>Test Level:</td><td>
<table>
<tr><td rowspan="2">Characteristics</td><td colspan="2">Test Levels</td></tr>
<tr><td>Self-ballasted lamps</td><td>Lighting equipment (except self-ballasted lamps≤25W)</td></tr>
<tr><td>Line to line</td><td>±0.5kV</td><td>±1kV</td></tr>
<tr><td>Line to ground</td><td>N/A</td><td>±2kV</td></tr>
</table>
Note: In addition to the specified test level, all lower test levels as detailed in IEC 61000-4-5 should also be satisfed.
</td></tr>
<tr><td>Polarity:</td><td>Positive & Negative</td></tr>
<tr><td>Generator source impedance:</td><td>2Ω (line-line coupling)</td></tr>
<tr><td>No. of surges:</td><td>5 positive at 90°, 5 negative at 270°</td></tr>
<tr><td>Performance Criterion:</td><td>C</td></tr>
<tr><td>Test setup:</td><td> 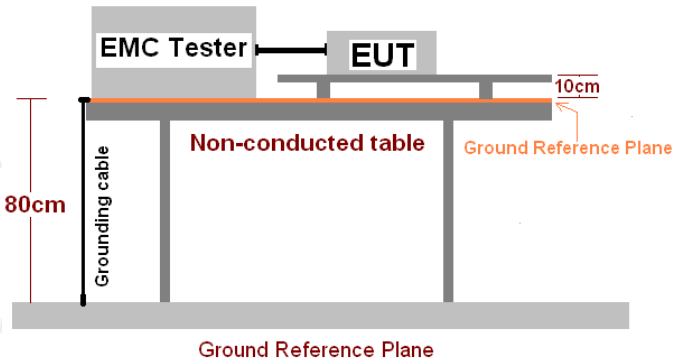
</td></tr>
<tr><td>Test procedure</td><td>1. For line-to-line coupling mode, provide a 1.2/50us voltage surge (at open-circuit condition) and 8/20us current surge to EUT selected points, and for active line / neutral lines to ground.
2. At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are applied during test.
3. Different phase angles are done individually.
4. Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.</td></tr>
<tr><td>Test environment:</td><td>Temp.: 26 °C | Humid.: 53% | Press.: 1012mbar</td></tr>
<tr><td>Test Instruments:</td><td>Refer to section 6 for details</td></tr>
<tr><td>Test mode:</td><td>Refer to section 5.3 for details</td></tr>
<tr><td>Test results:</td><td>Pass</td></tr>
</table>

RADER CERTIFICATION CO., LTD.
Add: Qiaohongsheng Cultural Creative Park, Yintian Industrial Zone, Xixiang Street, Bao 'an District, Shenzhen
Tel: 0755-29451282 http://www.rcocn.cn

Measurement Record:

Location	Level(kV)	Pulse No	Surge Interval	Phase(deg)	Observations (Performance Criterion)	Result
L-N	+1	5	60s	90°	A	Pass
	-1			270°		
	-2			270°		

Remarks:

Performance Criteria: A, B, C: Refer to section 8.1 for details

8.6 Conducted Immunity

Test Requirement:	EN IEC 61547		
Test Method:	EN 61000-4-6		
Frequency range:	0.15MHz to 80MHz		
Test Level:	3V rms on AC Ports (unmodulated emf into 150 Ω)		
Modulation:	80%, 1kHz Amplitude Modulation		
Performance Criterion:	A		
Test setup:	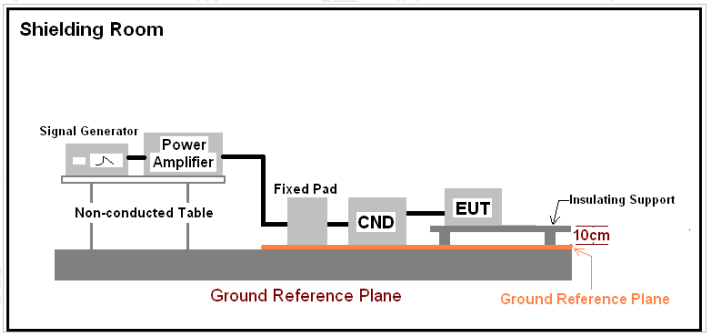		
Test Procedure:	1. The EUT are placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible). 2. The disturbance signal described below is injected to EUT through CDN. 3. The EUT operates within its operational mode(s) under intended climatic conditions after power on. 4. Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.		
Test environment:	Temp.: 24 °C	Humid.: 51%	Press.: 1012mbar
Test Instruments:	Refer to section 6 for details		
Test mode:	Refer to section 5.3 for details		
Test results:	Pass		

Measurement Record:

Frequency	Injected Position	Level	Modulation	Observations (Performance Criterion)	Result
150kHz to 80MHz	AC Mains	3Vrms	1 kHz, 80 % Amp. Mod, 1 % increment, dwell time=2seconds	A	Pass

Remark:

Performance Criteria: A, B, C: Refer to section 8.1 for details

RADER CERTIFICATION CO., LTD.
Add: Qiaohongsheng Cultural Creative Park, Yintian Industrial Zone, Xixiang Street, Bao 'an District, Shenzhen
Tel: 0755-29451282 http://www.rcocn.cn

8.7 Voltage Dips and Interruptions

Test Requirement:	EN IEC 61547
Test Method:	EN 61000-4-11
Test Level:	0% of U_T (Supply Voltage) for 0.5 Periods 70 % of U_T (Supply Voltage) for 10 Periods
No. of Dips / Interruptions:	3 per Level
Performance Criterion:	100% VD ----Performance criterion: B 30% VD ----Performance criterion: B
Test setup:	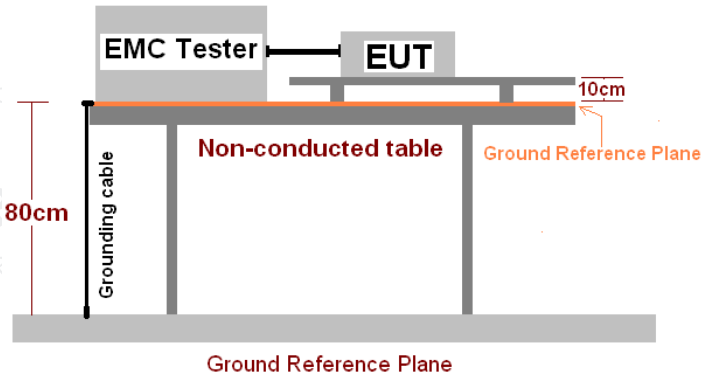
Test Procedure:	1. The EUT and test generator were setup as shown on above setup photo. 2. The interruptions are introduced at selected phase angles with specified duration. 3. Record any degradation of performance.
Test environment:	Temp.: 26 °C | Humid.: 53% | Press.: 1 012mbar
Test Instruments:	Refer to section 6 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement Record:

Test Level % UT	Duration (Periods)	Phase angle	No. of drop out	Time between dropout	Observations (Performance Criterion)	Result
0	0.5	0°,90°,180°,270°	3	10s	A	Pass
70	10	0°,90°,180°,270°	3	10s	B	Pass

Remark:

Performance Criteria: A, B, C: Refer to section 8.1 for details

9 EUT Constructional Details

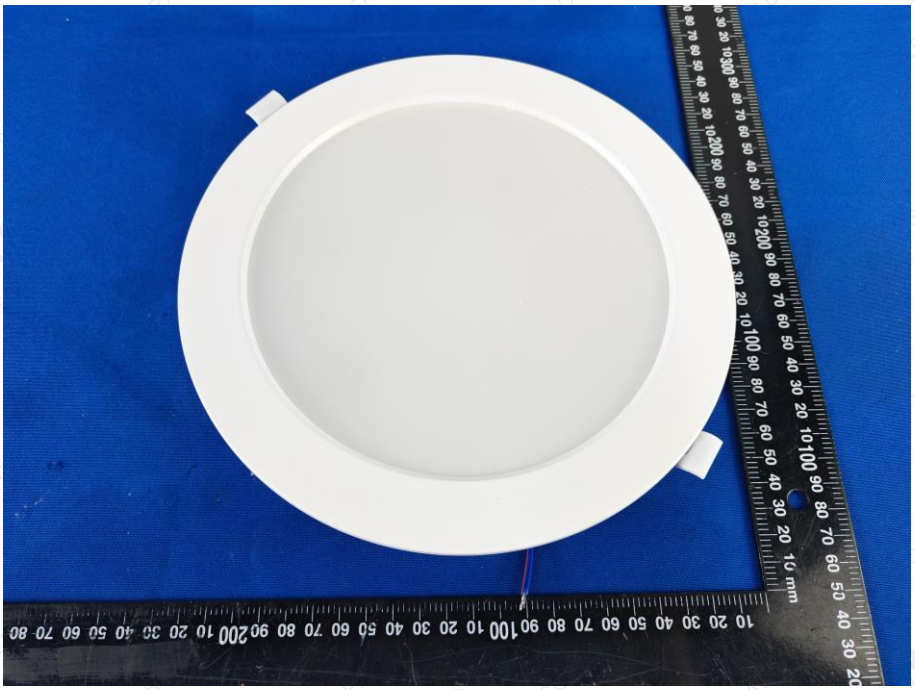

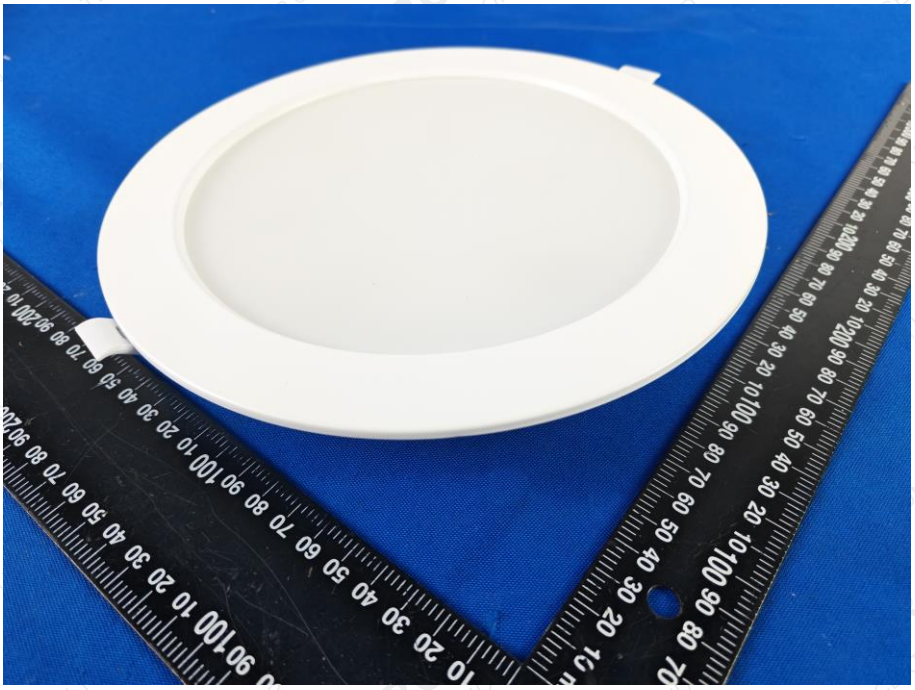

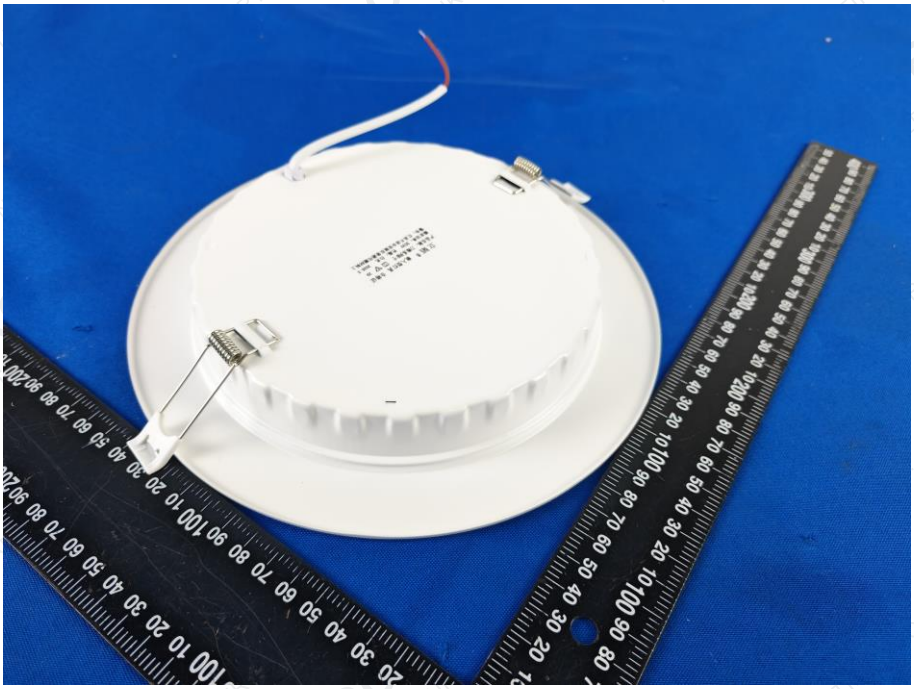

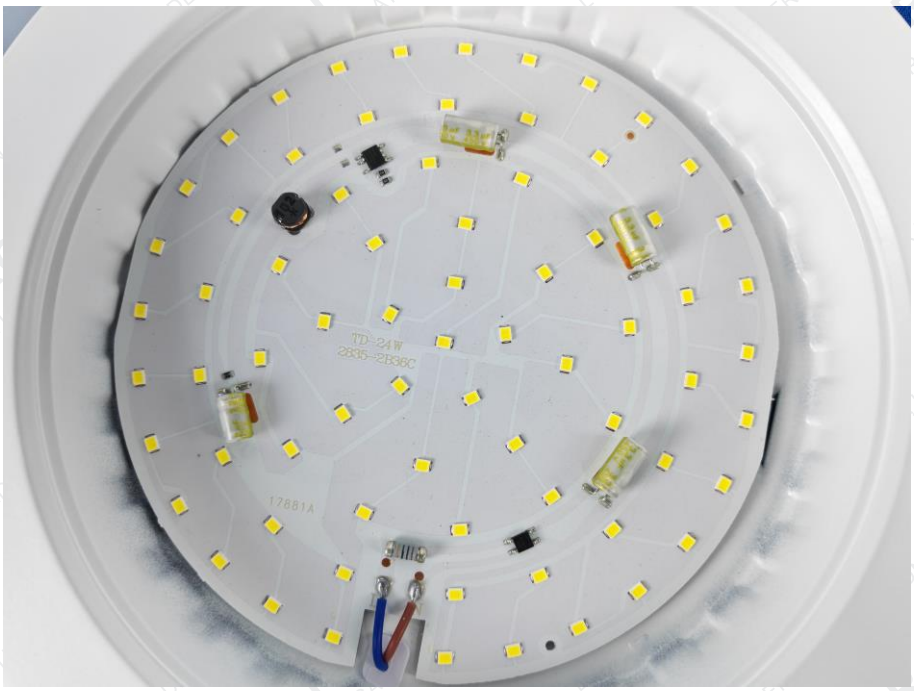

------ End------

RADER CERTIFICATION CO., LTD.
Add: Qiaohongsheng Cultural Creative Park, Yintian Industrial Zone, Xixiang Street, Bao 'an District, Shenzhen
Tel: 0755-29451282 http://www.rcocn.cn